

Vapor Proof Fixture



Project Name:

Date:

Prepared By:

Notes:

Construction

Constructed in a durable plastic; equipped with both clear and frosted lenses for glare prevention and maximized brightness.

Finish

Luminaire finished in a smooth, white exterior for consistent and long-lasting color. No toxic heavy metals, VOC, or mercury were used in the design of this product.

Installation

Available in 4 and 5 ft., this easy-to-install luminaire supports pendant, ceiling, and wall-mounting solutions for application in parking lots, gas stations, and warehouses.

Testing and Certifications

All luminaires have been tested by an independent laboratory in accordance with IESNA LM79 and LM80. Product certifications include: DLC, ETL, Title 24, RoHS, Lighting Facts, and Safety Listing.

Options, Accessories and Controls

Luminaire is compatible with most of the 1-10V dimming systems in the market. An internal battery backup unit is available, in addition, to standard ½ KO sensor compatible with all sensors.

Lifespan and Warranty

Industry-leading L70 rated lifetime of over 50,000 hours with ATG's guaranteed five (5) year warranty.

Product Description

The iBright™ LED Vapor Proof Fixture offers the flexibility and ease of installation as it supports pendant, ceiling, and wall-mounting solutions. Available in 4 and 5 ft, it is ideal for application in parking lots, gas stations, and warehouses. With an impressive design and polished finish it delivers the perfect ambient lighting.

Features

- Available Dual Function Sensors: Motion & Photocell
- Maintenance Free & Environmentally Friendly (No Mercury Used)
- Dusk-To-Dawn Occupancy Control Compatible
- IES LM80 Tested LED
- LM79 Data & IES Files Available
- 1-10V Dimming Title 24 Compliant
- Available in 40 & 50-watts
- DLC Product Code: PBWM265U


Ordering Information:

Typical Order Example: VP4FT4K-10


Series	Size	CCT	Dimming	Options
VP=Vapor Proof	4FT=4FT	3K=3000K 35=3500K 4K=4000K 5K=5000K	10=1-10V Dimming	XXXX*

*X=0-9, A-Z or blank

Model	Wattage	Input Voltage	Lm Efficacy	Lm Flux	CRI	Color Temp	Power Factor	THD	L70Life time	Size
VP4FT	40w	100~277VAC	108Lm/W	4000LM	83	4000K 5000K	>0.92	<20%	90,000H	49.80*5.08*3.46in
VP5FT	50w	100~277VAC	105Lm/W	5200LM	85	4000K 5000K	>0.92	<20%	90,000H	61.8*5.08*3.46 in
Finish Color	Housing		Lens Type		Certification		Warranty			
White	PC		Clear, Frosted		DLC, DLC Pending(VP5FT), ETL		5 Years			

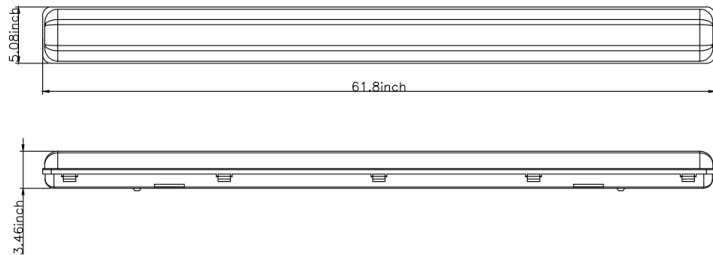

Luminous Intensity Distribution

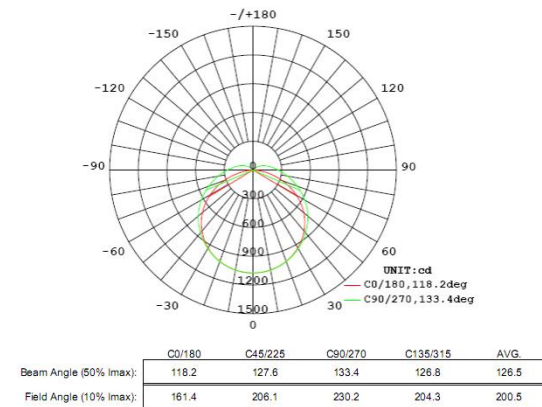

877.461.5333



sales@atgelectronics.com



www.atgelectronics.com