



ProLED® Panel Light Series



Halco Lighting Technologies ProLED® Panel Light Series maximizes value as an energy efficient alternative to recessed Fluorescent fixtures. With multiple sizes available, the fixture's lifetime is rated twice as long as Fluorescent fixtures, while increasing efficacy of delivered lumens. ProLED Panel Light Series is backed by a 5-Year Limited Warranty.

Specifications:

- Available in 1' x 4', 2' x 2' and 2' x 4' to fit standard recessed installations
- Direct backlit design provides a smooth and more uniform light distribution than edge-lit panels
- White powder coated steel housing
- Light weight - 9lbs 2' x 2' and 15lbs. 2' x 4'
- 0-10V dimming standard
- 50,000 hour rated life, up-to 2 times standard T8 Fluorescent
- Available in 3500K, 4000K and 5000K CCT
- 82 CRI provides high quality and consistent color rendering
- Quiet & flicker-free LED technology
- No Mercury
- ETL Listed
- DLC Qualified
- RoHS Compliant
- 5-Year Limited Warranty

- » Dimmable
- » 5-Year Limited Warranty

Markets:

- Commercial
- Education
- Healthcare
- Hospitality
- Retail

Applications:

- Office
- Lobby
- Hallway
- Conference Room
- Classroom

where there's light, there's halco®

Contact your account representative at 800.677.3334 for pricing, orders and technical support.

Visit us at halcolighting.com




Ordering Information


Watt	Product #	Product Code	Voltage	CCT	CRI	Lumen Output	Lifetime	Beam Angle	Dimmable	DLC Listed
2' x 2'										
35	80918	22PNL35/835/LED	100~277V	3500K	82	3000	50000	120	0-10V	Yes
35	80900	22PNL35/840/LED	100~277V	4000K	82	3000	50000	120	0-10V	Yes
35	80901	22PNL35/850/LED	100~277V	5000K	82	3000	50000	120	0-10V	Yes
2' x 4'										
52	80919	24PNL52/835/LED	100~277V	3500K	82	4600	50000	120	0-10V	Yes
52	80902	24PNL52/840/LED	100~277V	4000K	82	4600	50000	120	0-10V	Yes
52	80903	24PNL52/850/LED	100~277V	5000K	82	4600	50000	120	0-10V	Yes
1' x 4'										
35	80917	14PNL35/835/LED	100~277V	3500K	82	3000	50000	120	0-10V	Yes
35	80908	14PNL35/840/LED	100~277V	4000K	82	3000	50000	120	0-10V	Yes
35	80909	14PNL35/850/LED	100~277V	5000K	82	3000	50000	120	0-10V	Yes

Dimensions

22PNL35/835/LED
 22PNL35/840/LED
 22PNL35/850/LED

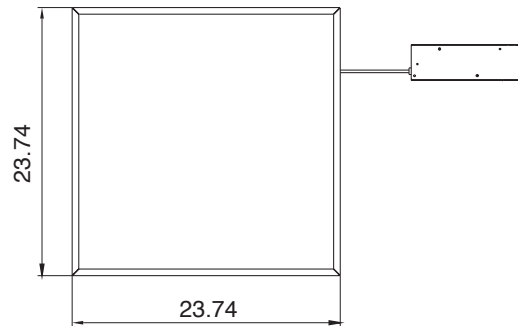

24PNL52/835/LED
 24PNL52/850/LED
 24PNL52/840/LED

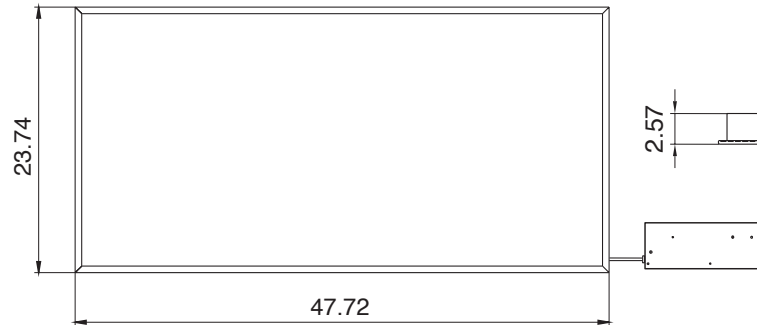

14PNL35/835/LED
 14PNL35/840/LED
 14PNL35/850/LED

